



# Route 66 Manual

Model: ZA-10

[www.drzamps.com](http://www.drzamps.com)



This symbol warns the user of dangerous voltage levels localized within the enclosure.



This symbol advises the user to read all accompanying literature for safely operating the unit

### **Important Safety Instructions**

- 1) Read these instructions.
  - 2) Keep these instructions.
  - 3) Heed all warnings.
  - 4) Follow all instructions.
  - 5) Do not use this apparatus near water.
  - 6) Clean only with dry cloth.
  - 7) Do not block any ventilation openings. Maintain at least 3 feet of distance around all sides of amplifier. Do not block any ventilation openings with items such as newspapers, tablecloths, curtains, etc.
  - 8) Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
  - 9) Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
  - 10) Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
  - 11) Only use attachments/accessories specified by the manufacturer.
  - 12) Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
  - 13) Unplug this apparatus during lightning storms or when unused for long periods of time.
  - 14) Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
  - 15) Avoid placing any liquids on or near the amplifier that may splash or drip such as those contained in bottles, cans, glasses, etc.
- \*Dr Z amplifiers are capable of producing very high sound pressure levels which can cause temporary or permanent hearing damage.
- \*If any screw that is actually on the amp chassis needs to be replaced contact Dr Z Amps for the proper size. Screw size is critical for inner chassis clearances.

## General Information

The Route 66 is an all original Dr. Z design based on the incredible KT-66 tube originally built by Genelex. This tube generates the “Milkshake Thick” tones, as heard on John Mayall’s “Bluesbreaker” album featuring Eric Clapton (the “Beano Album” as it is known to many).

This is not a duplicate of the Marshall JTM-45, but completely original spin with new tonal end results. The Route 66 has an EF-86 front-end. For those not familiar with this tube, it is a 9 pin pentode that offers incredible gain and input dynamics. It is normally used in high-end stereos, most often for its accurate transfer of input signal, balance, and headroom.

The Route 66 features a deceptively simple tone stack, consisting of Volume, Bass, and Treble, which feeds a non-negative feedback Phase Inverter, for true harmonic content and full output tube dynamics. It has a 5U4 Tube Rectifier to complete the round enveloped tone. The amp has piano-like clarity with endless sustain, even at low volumes. Its 32 watts truly sing when driven hard in a focused, thick distortion, with the tightest bass response you’ve ever heard.

## Specifications


<b>Power Output</b>	32 watts
<b>Output Tubes</b>	2 - KT66
<b>Preamp Tubes</b>	1 - EF86 (NOS), 1 - 12AX7
<b>Rectifier</b>	1 - 5U4
<b>Controls</b>	Volume, Bass, Treble
<b>Configurations</b>	Head
<b>Colors</b>	Black, Blonde, Red
<b>Dimension &amp; Weight</b>	Head: 17 ½” W x 9” H x 9 ½” D, 35 lbs.

## FRONT PANEL



- 1. Power Indicator:** Lights up when power is switched on. If bulb fails replace with type T47.
- 2. Power:** Switch up to turn on amplifier. Switch down to turn off amplifier.
- 3. Stand-By:** Leave in off position for 1 minute when powering up the amp. Turn on for play. Place in off position for extended break periods.
- 4. Treble:** Controls overall high frequency response.
- 5. Bass:** Controls overall low frequency response.
- 6. Volume:** Controls loudness of amp. As you turn the volume up more natural drive will occur along with an increase in level.
- 7. Input:** Input jack for your guitar.

## REAR PANEL

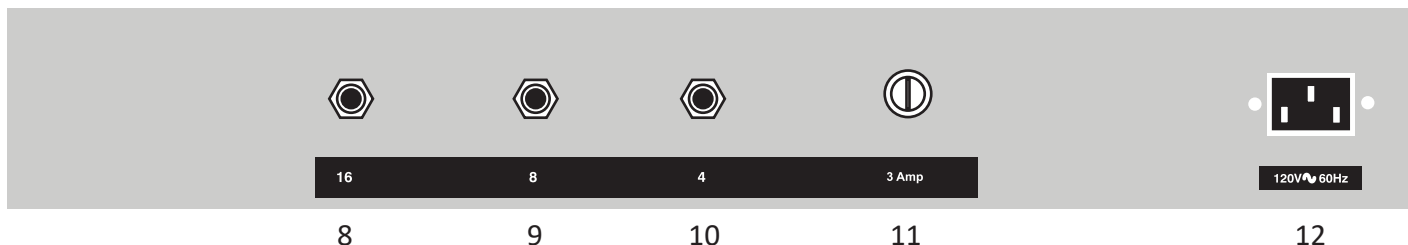


- 8. 16 OHM Speaker Jack:** Plug in 16 ohm speaker here. Always have a speaker plugged into the amp when it is powered on. Always match the speaker impedance to the proper speaker out jack. This will allow the amp to sound its best and avoid damage.
- 9. 8 OHM Speaker Jack:** Plug in 8 ohm speaker here. Always have a speaker plugged into the amp when it is powered on. Always match the speaker impedance to the proper speaker out jack. This will allow the amp to sound its best and avoid damage.
- 10. 4 OHM Speaker Jack:** Plug in 4 ohm speaker here. Always have a speaker plugged into the amp when it is powered on. Always match the speaker impedance to the proper speaker out jack. This will allow the amp to sound its best and avoid damage.
- 11. Fuse:** The fuse protects the amp from electrical faults. Replace only with the same rating and type stated below fuse holder (3A 250v Fast Acting). If the amp repeatedly blows the fuse contact your dealer or Dr Z Amps.
- 12. AC Inlet:** (Class I Wiring). This device is used for disconnection from power mains and must remain readily opearable. The power indicator light does not indicate connection to power mains. The power cord must be disconnected to disconnect amplifier from power mains.



MODEL: \_\_\_\_\_

SERIAL NUMBER: \_\_\_\_\_

INPUT VOLTAGE: \_\_\_\_\_



MADE IN USA



Dr Z Amps 17011 Broadway Ave. Maple Heights, OH 44137 USA

## DECLARATION OF CONFORMITY



We, Dr Z Amps, declare, taking this declaration under our total responsibility, that guitar amplifier model Route 66 (ZA-10) is in conformity with EN 55013, EN 61000-3-2, EN 61000-3-3, and EN 55020 in accordance with the Directive 2006/95/EC of 12 December 2006, and in conformity with the 2011/65/ECC Rohs Directive.

11-19-2014

---

Michael Zaite, General Manager Dr Z Amps



## EC/EU Declaration of Conformity

Document: CE – ZA-10

Manufacturer: Dr. Z Amplification  
17011 Broadway Ave.  
Maple Heights, OH 44137 -3407  
USA

We declare that the designated product (s)  
DR. Z ROUTE 66  
is/are in conformity with the European Directives:

2014/30/EU EMC Directive of 26 February 2014

2011/65/EU RoHS Directive of 8 June 2011

2014/35/EU Electrical equipment designed for use within certain voltage limits

This declaration certifies compliance with the indicated directives but implies no warranty of properties. The safety instructions of the accompanying documentation shall be observed. This declaration of conformity is issued under the sole responsibility of the manufacturer.

Issuer: Dr. Z Amplification  
17011 Broadway Ave.  
Maple Heights, OH 44137 -3407  
USA

Place, date: Maple Heights, OH USA , 01.AUGUST.2016

Legally binding signature:

M.D. Zaite, General Manager, Dr. Z Amps